

A0
Version

CHAMPION
MACHINERY

MACHINERY MANUFACTURER OF **LUXURY PAPER BAGS**
CHAMPION MACHINERY MANUFACTURING CO.,LTD.



Tel: +86 139 2586 8276
WhatsApp: +86 139 2586 8276



E-mail: Bel@championbagmaker.com
Website: www.paper-bag-machine.com



Add: 42#2and Longyan Industrial Avenue, Humen Town
Dongguan City, China PR



CMRD-450D

Automatic Tote Bag Stringing Machine

全自动手提袋穿绳机

目录



Contents

机器名称图片 Machine Name Image	3
机器说明 Machine Description	3
机器特点 Machine Features	4
工艺流程图 Process Flowchart	4
原材料 Raw Material	4
绳子样式 Hand Rope Style	5
丝带样式 Ribbon Style	6
支持各种袋底样式 Support Various Bag Bottom Styles	7
主要技术参数 TechnicalData	7
设备占地规划 Machine Floor Plan	7

CMRD-450D

Automatic Tote Bag Stringing Machine

全自动手提袋穿绳机

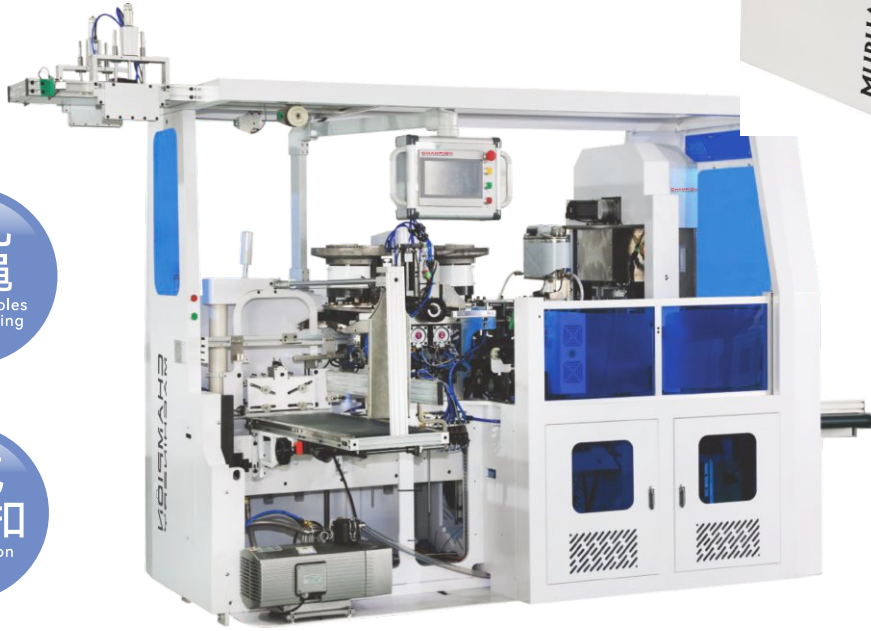

- Drawstring hole spacing
穿绳孔位间距
65-200mm
- Hole diameter
孔位内径
4-6mm

Paper Bag



绳材范围 Rope Material

三股绳, 涤纶, 绸缎, 棉绳, 丝带, 低弹力绳, 纸绳等(塑片可制作(鸭舌扣,马蹄口)的材质都可覆盖)

Cotton, Three-stranded rope, Ribbonrope, wrapped with plastic card heads





机器说明 Machine Description

全自动手提袋穿绳机, 是自动化程度较高的专用设备, 用于为各类手提袋, 自动穿入提绳。实现高精度、高效率的穿绳作业, 适用于大批量生产场景。全自动手提袋穿绳机可实现自动送袋、不间断加袋、打气眼铁扣、包塑头、绕线、计数、自动报警等功能。可调节袋的尺寸、高度和孔距。直接节省成本, 提高效率。

The fully automatic bag stringing machine is a highly automated, specialized machine used to automatically thread strings into various types of bags. It achieves high-precision and efficient stringing, making it suitable for high-volume production. It features automatic bag feeding, continuous bag loading, eyelet buckle installation, plastic-wrapped head assembly, string winding, counting, and automatic alarms. Bag size, height, and hole spacing are adjustable, directly saving costs and improving efficiency.




绳子样式 Hand Rope Style

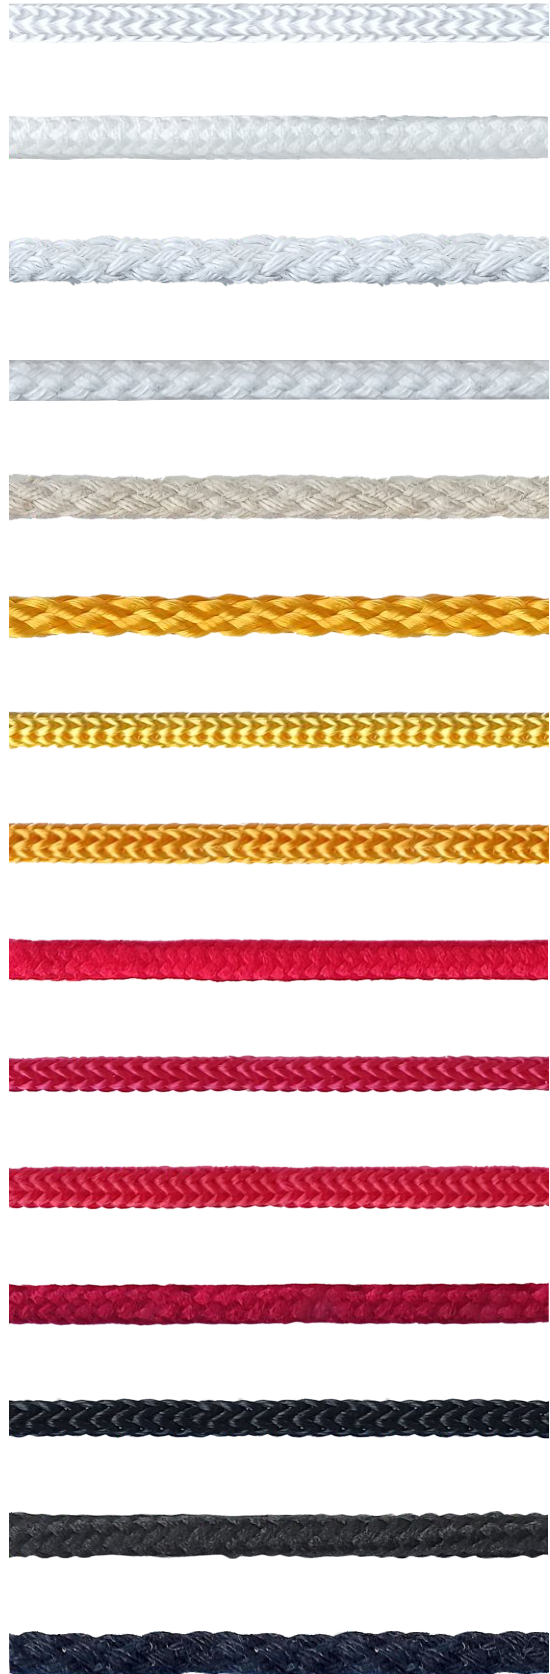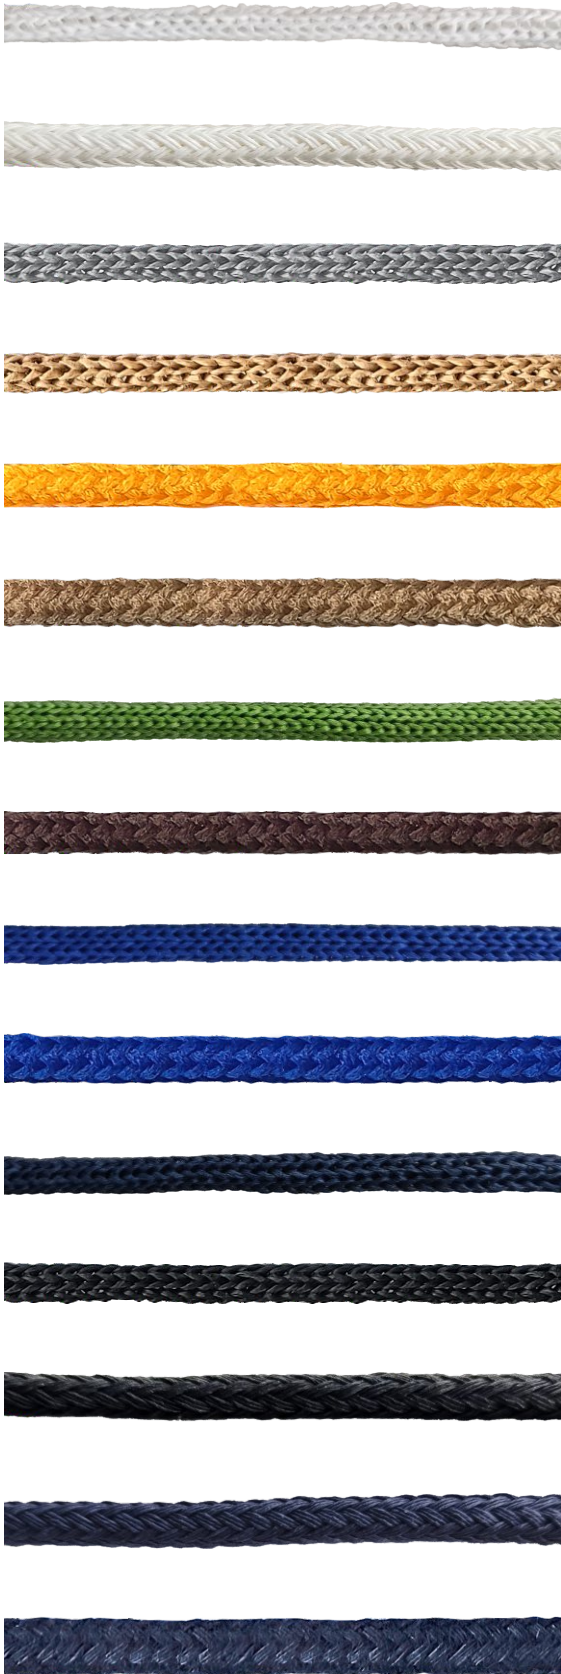




丝带样式 Ribbon Style

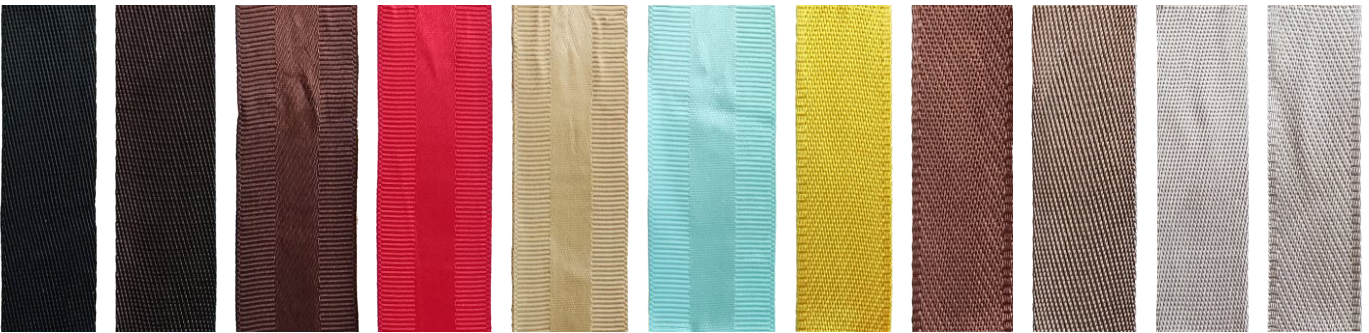



支持各种袋底样式 Support Various Bag Bottom Styles

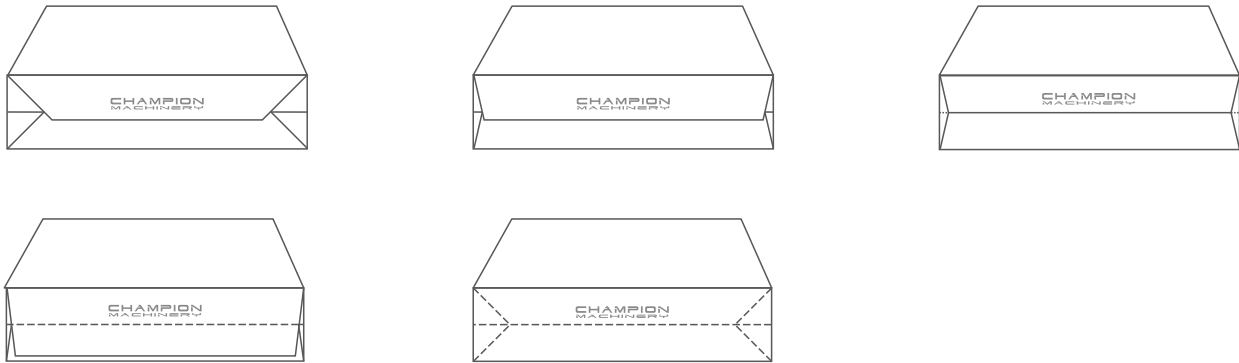

主要技术参数 TechnicalData

纸袋尺寸 Sheet Paper Size		
袋面最小尺寸	Min. bag Size	180x160x(80-100)mm
袋面最大尺寸	Max. bag Size	540x450x(80-250)mm
纸张克重 Bag tickness		
纸张克重	Bag tickness	140-300GSM
孔位 Hole position		
穿绳孔位间距	Drawsring hole spacing	65-200mm
孔位内径	Hole diameter	4-6mm
运行 Running		
带鸡眼速度	Speed include pumping eyes	50pcs/min
不带鸡眼速度	Speed without pumping eyes	50pcs/min
安装要求 Installation		
功率	Power	8.2kw
尺寸和重量 Dimensions and weight		
设备尺寸	Size	3000x2000x2200mm
重量	Weight	2T
绳长String length		
绳长	String length	Min.200mm plus hole spacing Total length 320-580mm, excluding rope tension (最短200mm+孔距)总长度320-580mm(含绳子张力)



设备占地规划 Machine Floor Plan

