

**A0**  
Version

**CHAMPION**  
MACHINERY

MACHINERY MANUFACTURER OF **LUXURY PAPER BAGS**  
CHAMPION MACHINERY MANUFACTURING CO.,LTD.




Tel: +86 139 2586 8276  
WhatsApp: +86 139 2586 8276



E-mail: [Bel@championbagmaker.com](mailto:Bel@championbagmaker.com)  
Website: [www.paper-bag-machine.com](http://www.paper-bag-machine.com)



Add: 42#2and Longyan Industrial Avenue, Humen Town  
Dongguan City, China PR

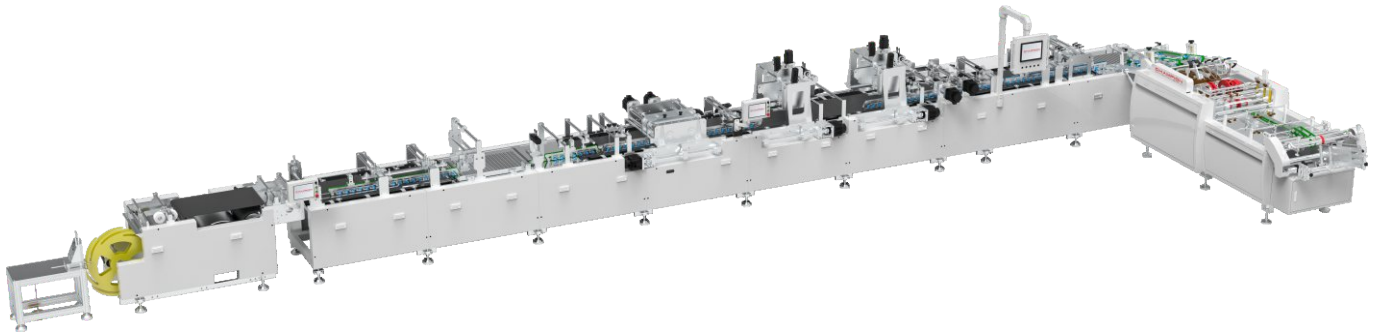

## **CMBM-320WP**

ECO -BAG No Leake Airplane / Train / Bus / Waste  
Paper Bag Machine

环保航空呕吐袋底部生产线L型

## 目录



### Contents

机器名称图片 Machine Name Image	3
工艺流程图 Process Flowchart	3
机器说明 Machine Description	4
机器特点 Machine Features	4
纸袋简介 Brief Description	5
上机物料要求 Machine Dscription	6
主要技术参数 Technical Data	6
设备占地规划 Machine Floor Plan	6
核心配件 Core Accessories	7

# CMBM-320WP


ECO -BAG No Leake Airplane / Train / Bus / Waste Paper Bag Machine

环保航空呕吐袋底部生产线L型

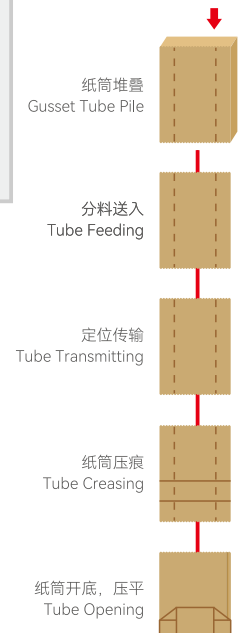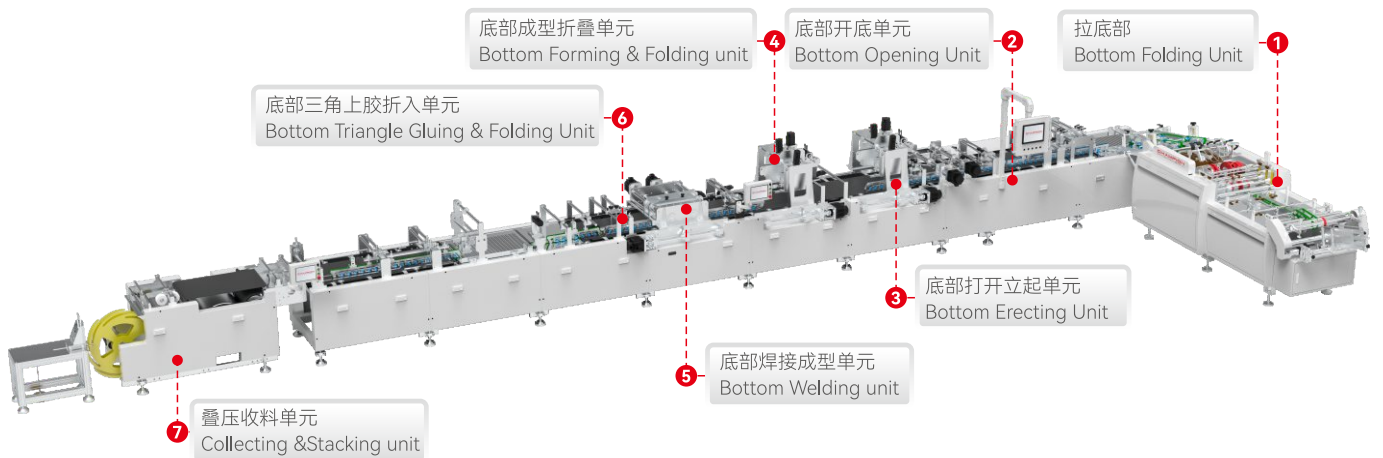

## 工艺流程图 Process Flowchart

热熔胶位 Hot Melt Glue Bit  
进纸方向（印刷面朝下） Sheet direction going printing on the other side

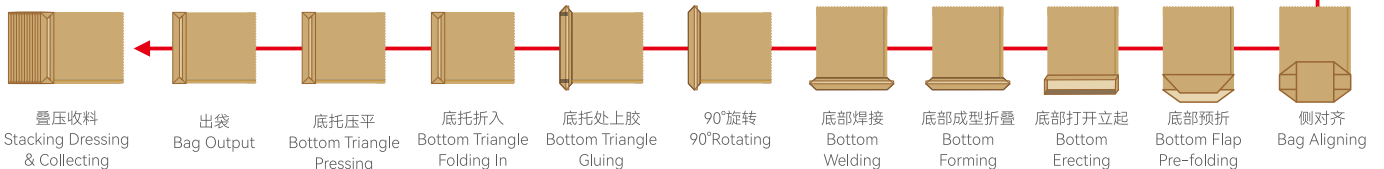



## 机器说明 Machine Description

### 袋底成型模块

**吹气开底机构:** 电磁阀控制前后吹气装置, 高压气体精准撑开袋底, 为折底工序预制六边形形态1。

**热烫密封单元:** 瞬时高温压合覆膜层, 形成密封边线, 防水防漏17。

### 智能控制系统

**人机交互界面:** 触摸屏集中控制, 实时显示故障警报及参数微调 (如温度、速度)。

**PLC+光电检测:** 光电传感器联动伺服电机, 实现无料停机、夹袋检测等功能。

### 多功能执行组件

**夹持系统:** 折口夹持板与袋口夹持板协同固定袋体, 振动装置压实内容物, 减少袋内空气。

**阀口贴条机构:** 自动粘贴加强底纸, 提升承重能力。

### Bag Bottom Forming Module

**Blowing Bottom Opening Mechanism:** Solenoid valves control the front and rear air blowing mechanisms. High-pressure air precisely opens the bag bottom, performing a hexagonal shape for the bottom folding process.

**Hot Sealing Unit:** Instantaneous high-temperature lamination creates a sealed edge, ensuring water and leak resistance.

### Intelligent Control System

**Human-Machine Interface:** A touchscreen provides centralized control, displaying real-time fault alerts and allowing fine-tuning of parameters (such as temperature and speed).

**PLC + Photoelectric Detection:** A photoelectric sensor coupled to a servo motor enables functions such as no-material shutdown and bag clamping detection.

### Multifunctional Actuator

**Clamping System:** The folding and bag opening clamping plates work together to secure the bag. A vibration mechanism compacts the contents and reduces air in the bag.

**Valve Tape Mechanism:** Automatically applies reinforced liner paper to improve load-bearing capacity.



## 机器特点 Machine Features

**无缝生产链:** 集成上料、开底、折底、贴底等工序, 减少人工干预, 大幅提升效率。

**六边形袋底成型:** 前后高压吹气装置精准开底, 使袋底呈六边形结构, 结合热烫压合技术, 实现物理防漏。

**动态调节机构:** 折口夹持板配备间隙/高度调节模块 (限位块+伸缩杆), 兼容不同克重纸张。

吹气角度可旋转调节 (旋转杆+链轮传动), 避免气流偏移导致袋形歪斜。

**节能设计:** 自动润滑系统降低能耗, 变频电机牵引上料减少空转损耗。

**覆膜纸袋专用:** 支持覆膜牛皮纸、医用纸等防水材料, 热压覆膜层增强防渗性。

**无胶水工艺:** 替代传统胶粘侧边, 采用热烫成型, 杜绝侧边开裂风险。

**Seamless production chain:** The process of loading, opening the bottom, folding the bottom and sticking the bottom are integrated to reduce manual intervention and greatly improve efficiency.

**Hexagonal bottom forming:** Front and rear high-pressure air blowers precisely open the bottom, creating a hexagonal structure. Combined with hot-stamping technology, this system provides physical leak prevention.

**Dynamic adjustment mechanism:** The folding clamping plate is equipped with a gap/height adjustment module (limiting blocks + telescopic rod) to accommodate different paper weights.

The air blow angle is adjustable (rotating rod + sprocket drive) to prevent airflow deviation and bag shape distortion.

**Energy-saving design:** An automatic lubrication system reduces energy consumption, and a variable-frequency motor drives the material feeding process to reduce idling losses.

**Specialized for laminated paper bags:** Compatible with waterproof materials such as laminated kraft paper and medical paper, the hot-stamped lamination layer enhances impermeability.

**Glue-free process:** Instead of traditional gluing of the sides, hot-stamping is used to form the sides, eliminating the risk of cracking.



纸袋简介 / Brief Description

材料 Material


1. 淋膜纸 PE/PLA/PP/PCBA Coated Paper
2. 涂层纸 Water Based Coating Paper
3. 材料厚度 Material Thickness  
纸基厚度 Paper Thickness: 50~100gsm  
涂层/淋膜厚度 Coating Thickness: 10~30um
4. 纸袋尺寸 bag Sizes  
袋宽 Bag Width: 100~320mm  
袋高 Bag Height: 130~300mm  
风琴 Gusset: 70~170mm  
边封尺寸 Side Welding Margin: 15~30mm  
底封尺寸 Bottom Welding Margin: 20~35mm
5. 适用胶水: Non-glue, Water Glue, Hotmelt Glue, Pur Glue




上机物料要求 / Machine Description

涂层/淋膜厚度均匀性: 均匀性误差须小于±3um  
焊接熔化温度: 90~260°C


Coating thickness uniform: tolerance must be less than ±3um  
Welding temperature: 90~260°C



纸筒  
Tube



底部无贴底纸  
Bottom Shape Without  
Reinforcement



底部贴底纸  
Bottom Shape With  
Reinforcement



Plastic Free



Glue, Paper, Inks are  
100% Compostable



Plant-Based  
Non-GMO Lining Leak  
Resistant



Sturdy Bag  
Stands up on its own



D400  
certified

D6868  
certified



SUSTAINABLE  
FORESTRY  
INITIATIVE

Made in Canada

**100% Compos Table Paper Bag Used For Kitchen Organic Waste**




**主要技术参数 TechnicalData**

纸筒宽度	Tube Width	100-320mm
纸筒长度	Tube Length	130-300mm
风琴	Paper Bag Gusset	65-160mm
纸筒克重	Tube Thickness	50-140g/m <sup>2</sup>
成品袋宽度	Bag Width	100-320mm
成品袋长度	Bag Length	100-260mm
生产速度	Speed	70pcs/min
总功率	Machine Power	380V / 50Hz 3Phase 选配220V
机器尺寸	Machine Size	15000x5000x1600mm
机器重量	Machine Weight	7000Kg
使用胶水	Applicable Glue	Non-glue, Water Glue, Hotmelt Glue, PUR Glue



**设备占地规划 Machine Floor Plan**

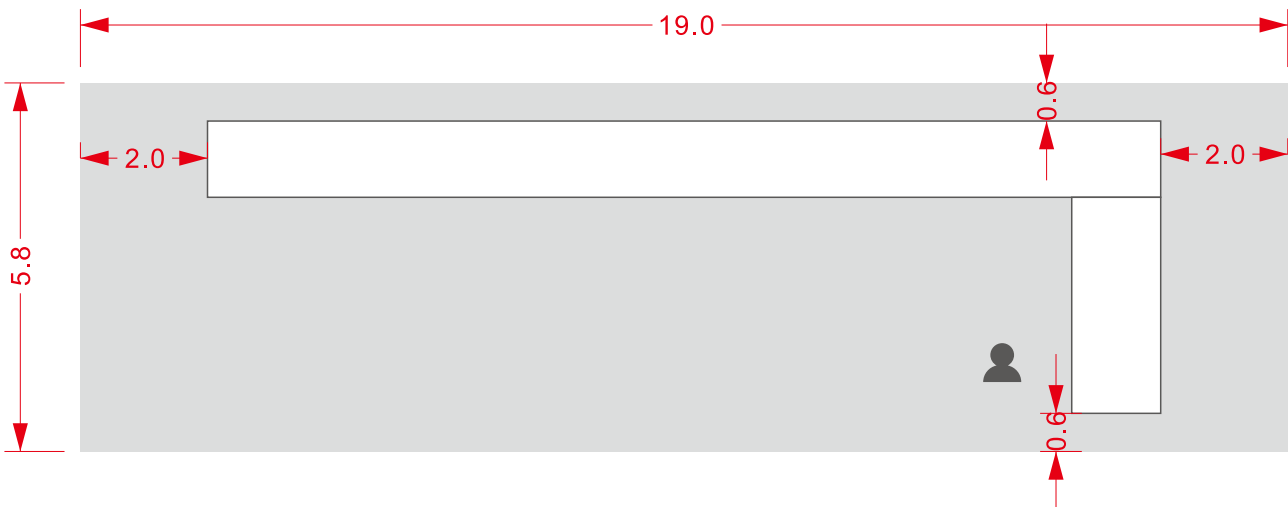



核心配件 Core Accessories



**SynMatic**

运动控制系统  
伺服电机/伺服驱动/变频器  
SIMOTION  
Servo motor/servo drive/frequency converter

安驰 中国  
SynMatic China



**SynMatic**

总线控制  
BUS CONTROL

安驰 中国  
SynMatic China



**FOTEK**

编码器/接近开关  
热过载继电器接触器  
ENCODER/PROXIMITY SWITCH  
Thermal overload relay contactor

阳明 台湾  
FOTEK Taiwan



**KEYENCE**

主光电眼/光纤  
MAIN OPTICAL EYE/FIBER

基恩士 日本  
Keyence Japan



**繁易**  
FLEXEM

触摸屏  
TOUCH SCREEN

繁易 中国  
FLEXEM China



**亞德客**  
AirTAC

电磁阀  
SOLENOID VALVE

亚德客 台湾  
AirTAC Taiwan



**CPG**

减速机马达  
REDUCER MOTOR

晟邦 台湾  
Shengbang CPG Taiwan



**SIEMENS**

主马达  
MAIN MOTOR

茵梦达 德国  
Innomotics Germany



**ORION**

真空泵  
VACUUM PUMP

好利旺 日本  
ORION Japan